
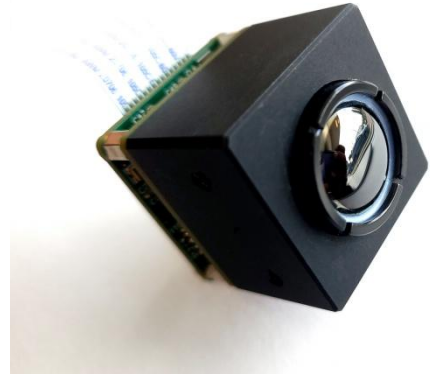


Infrared Sensor Module with MIPI CSI-2 Digital Output

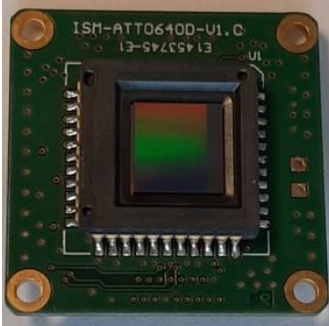


Key Benefits & Features

- ✓ 640 x 480 - 12 μ m pixel pitch, Lynred thermal imager
- ✓ GUI Software including NUC & BPR
- ✓ Shutterless continuous imaging
- ✓ Low power LWIR sensor (< 300 mW)

MIPI CSI-2 Frame Capture API and drivers for V4L2
Developers Platforms NVIDIA JETSON Xavier NX and Nano



Interface Software
ISEye GUI

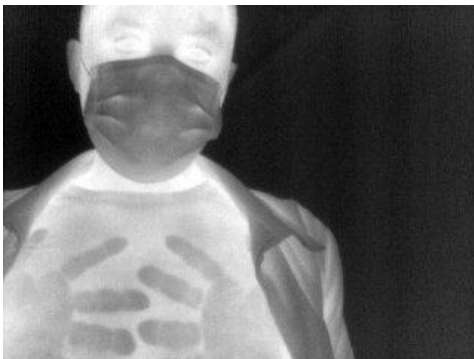

Specifications

Model Name	ISM-ATTO640D
-------------------	--------------

IR Image Sensor

Vendor / Name	Lynred ATTO640D-02
Technology	Uncooled (Microbolometer), LWIR
Pixel pitch	12µm
Max. Resolution	640 x 480
Sensor performance NETD	< 50 mK (for ATTO640D-02)
Optical lens	5.3 mm F/1.3 HFOV (89°) fixed focus or 4.3mm F/1.2 HFOV (112°) fixed focus
Bit depth	14 bits

Interface

Module Interface	MIPI CSI-2, 2 lanes
Control Interface	I2C (2 wires serial communication)
Clock Frequency	40 MHz
Interface Connector	MOLEX FPC 15POS 1.0 MM : 52271-1579
Trigger Input	Yes, 3.3V LVTTTL / LVCMOS
Trigger Output	Yes, 3.3V LVTTTL / LVCMOS
GPIO	1 OUT, 1.8V LVCMOS

Mechanical

Dimensions (LxWxH)	Stacking size 30mm x30mm x10mm
---------------------------	-----------------------------------

Electrical & Environmental

Input voltage	5V to 12V.
Power consumption	< 0.60 W (including IR image sensor)
Operating temperature	-40°C to +85°C
Storage temperature	-40°C to +85°C
Ambient Humidity	95% RH

Software Support

Driver	V4L2 Based Device Driver
Supported Platform(s)	NVIDIA JETSON Xavier NX / JETSON Nano
Linux Version(s)	Kernel 4.9.201
API Language	C / C++

Accessories

Flex cable 150 mm	WURTH : WR-FFC 686715152001
--------------------------	-----------------------------

Interface GUI for NVIDIA JETSON Xavier NX and Nano

ISEye GUI and SDK Camera Control, Image Capture and Viewer Software

